REPLACEMENT SHERT



FIG. 1

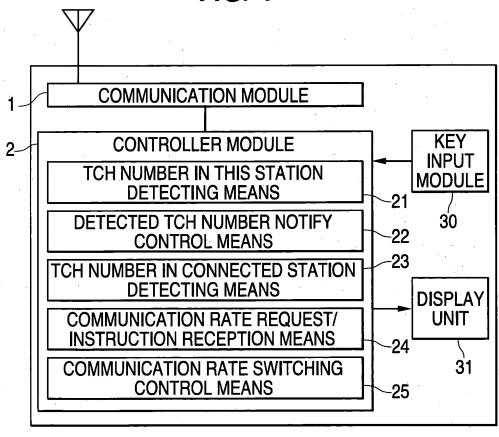



FIG. 2
DATA FRAME

CONTROL
INFORMATION


USER DATA

ERROR
DETECTION CODE


FIG. 3 TCH NUMBER TCH NUMBER IN CONNECTED IN CONNECTED TCH NUMBER STATION = "1". STATION = "2" IN THIS STATION = "1" SWITCHING A DATA COMMUNICATION RATE COMMUNICATION RATE TO 32 kbps TO 64 kbps TCH NUMBER IN THIS STATION = "2" **SWITCHING DATA** COMMUNICATION **TCH NUMBER** TCH NUMBER RATE TO 64 kbps IN CONNECTED IN CONNECTED STATION = "1" STATION = "2" **SWITCHING DATA** COMMUNICATION-RATE TO 32 kbps

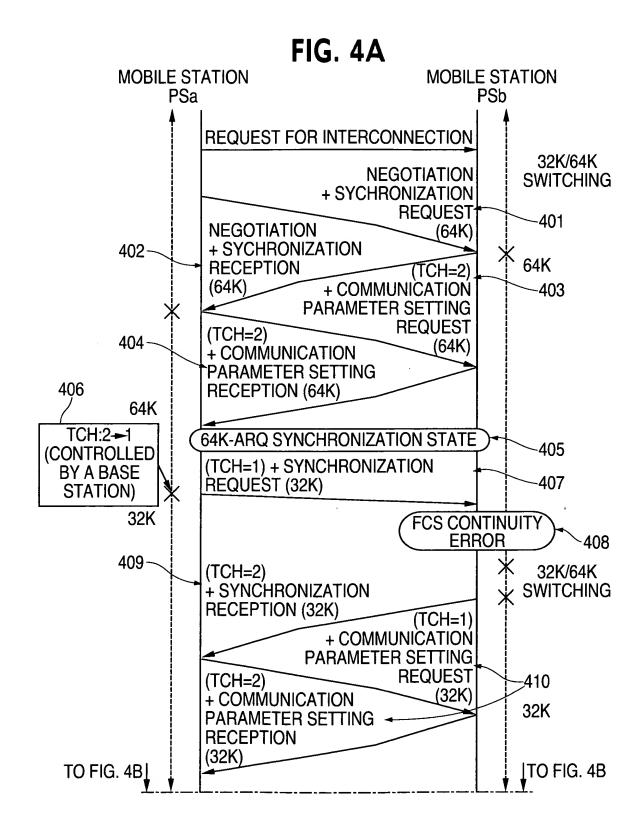


RRPLACEMENT.

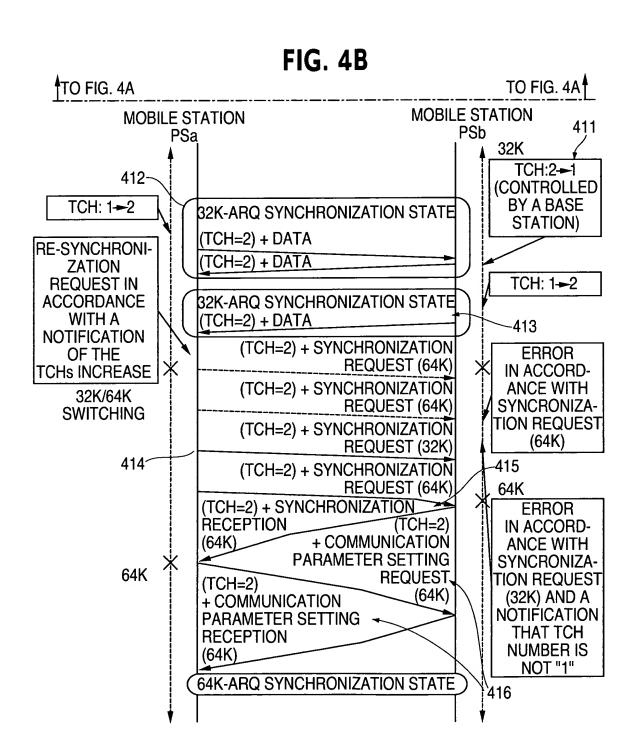

· REPLACEMENT

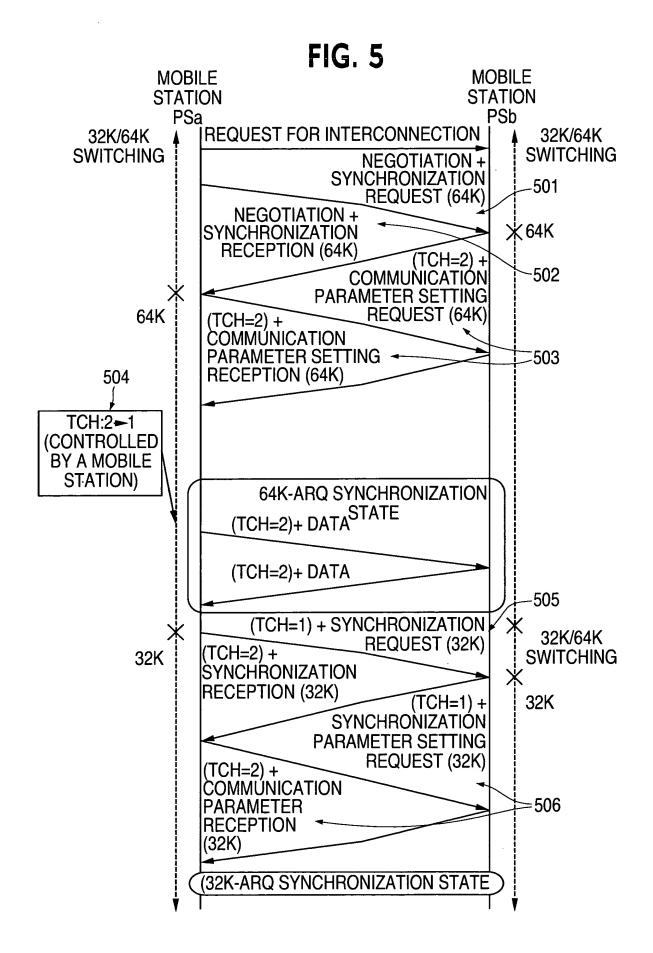

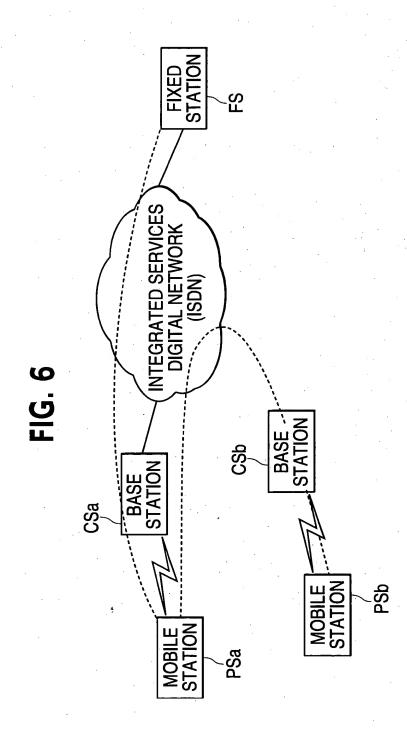

REPLACEMENT.

